

# SCH(125)P Sleeving – Technical Data Sheet

## Product Data

### Storage:

Cool dry place out of direct sunlight

### Material:

Polyolefin

### Operating Temperature:

-55°C to +125°C

## Application Method – Shrink on

Manufactured from OSCH(125) Polyolefin, SCH(125)P Cable Sleeves and Sleeving are flame retardant and self-extinguishing material for use on a variety of cables. SCH(125)P Cable Sleeves and Sleeving will operate in the temperature range -55°C to +125°C..

- Flame Retardant
- Self-Extinguishing
- Temperature range -55°C to +125°C
- Good Die electric strength
- Multiple colours available
- RoHS Compliant




Property	Value	Test Method
Operating Temperature	-55°C to +125°C	
Flammability	Pass	ASTM D 2671
Elongation after heat ageing	210%	SAE-AS23053
Heat shock	Pass	SAE-AS23053
Longitudinal change	-5%	SAE-AS23053
Tensile Strength	13 MPa	ASTM D 638
Elongation at break	400%	ASTM D 638
Secant Modulus	110 MPa	ASTM D 412
Voltage rating	600V	
Min. shrink temp for full recovery	90°C	Shrink Curve

# SCH(125)P Slewing – Technical Data Sheet

## Ordering Information


## 2:1 COMMERCIAL HEAT SHRINKABLE POLYOLEFIN:



PRODUCT REFERENCE	EXPANDED ID BORE MIN. (MM)	RECOVERED ID BORE MAX. (MM)	RECOVERED WALL NOMINAL (MM)	COLOUR CODE	FORM
SCH(125)P12	1.2	0.6	0.40	BK=Black	Continuous sleeving
SCH(125)P16	1.6	0.8	0.43	RD=Red	Kit Boxes
SCH(125)P24	2.4	1.2	0.51	YW=Yellow	Easy Peel Kit Card
SCH(125)P32	3.2	1.6	0.51	GN=Green	Kit Bags
SCH(125)P48	4.8	2.4	0.51	BE=Blue	
SCH(125)P64	6.4	3.2	0.64	WE=White	
SCH(125)P95	9.5	4.8	0.64		
SCH(125)P127	12.7	6.4	0.64		
SCH(125)P191	19.1	9.5	0.76		
SCH(125)P254	25.4	12.7	0.89		
SCH(125)P1016	101.6	50.8	1.40		

### Ordering Information Example

SCH(125)P 32 x 50 WE

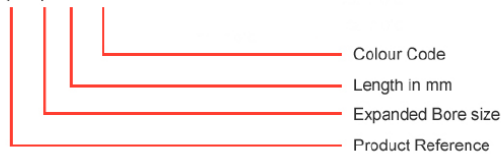

Omit the letter 'P' from code if you require continuous sleeving.

Colour Availability:

Black, Red, Yellow, Green, Blue, White.

Other sizes available on request

**Please contact us for any sizes or colours not listed.....**

## Business Management Accreditations



Registered in England No. 412829