

SDWP 4:1 CABLE SLEEVES & SLEEVING

HEAT-SHRINKABLE 4:1, DUAL WALL POLYOLEFIN (WITH ADHESIVE)

Product Data

APPLICATION METHOD - SHRINK ON

Manufactured from Siegrist OSDW (4:1), SDWP 4:1 Cable Sleeves and Sleeving is a flexible sleeving with an extreme shrink ratio, enabling one size to cover many different diameters and provides effective moisture resistant insulation of connectors, components and splices.

- Strong Adhesive
- Moisture Protection
- Flame Retardant (Jacket)
- RoHS Compliant



Material:

Dual Wall Polyolefin, 4:1

Operating Temperature:


-55 up to 125°C

Property	Value	Test Method
Operating Temperature	-55 up to 125°C	UL 224
Flammability	Pass	UL224
Elongation at Break	≥350%	ASTM D 638
Heat shock (250°C x 4h)	Pass	SAE-AS23053
Longitudinal change	≥ -7%	SAE-AS23053
Tensile Strength	≥ 15 MPa	ASTM D 638
Secant Modulus	≤ 80 MPa	ASTM D 882
Dielectric strength	≥ 20 kV/mm	ASTM D 876
Min. shrink temp for full recovery	110°C	Shrink Curve

Ordering Information

SDWP 4:1 CABLE SLEEVES & SLEEVING


HEAT-SHRINKABLE 4:1, DUAL WALL POLYOLEFIN (WITH ADHESIVE)



PRODCUT REFERENCE	ID Supplied (min min)	ID Recovery (max mm)	WALL THICKNESS (NOM. MM)
SDWP40/10	4.0	1.0	1.0
SDWP80/20	8.0	2.0	1.2
SDWP120/30	12.0	3.0	1.4
SDWP160/40	16.0	4.0	1.8
SDWP240/60	24.0	6.0	2.3
SDWP320/80	32.0	8.0	2.5
SDWP520/130	52.0	13.0	2.6

Ordering Information Example

SDWP4:1 40/10 x 50 BK

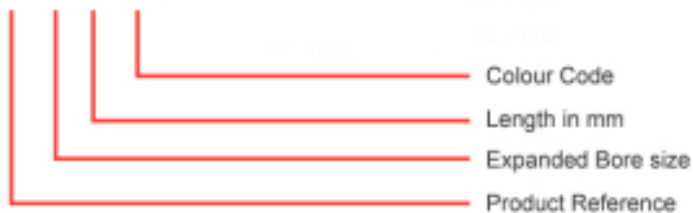

Available in black only

Business Management Accreditations



Registered in England No. 412829

Please contact us for any sizes or colours not listed.....