

# W3NH Cable Sleeves & Sleeving – Technical Data Sheet

## Product Data

### Storage:

Cool dry place out of direct sunlight

### Material:

Polyolefin

### Operating Temperature:

-40°C to +105°C

### Pack Quantity Tolerance of Cut lengths:

Under 5mm – Standard pack quantities  
500 / 1000 pcs +/- 5%

Over 5mm – Standard pack quantities of  
1000 +/- 2%


## Application Method – Shrink on

W3NH is a dual wall cable sleeving for use in areas where low fire hazard properties are mandatory, particularly mass-transit and underground areas. W3NH will operate in the temperature range -40°C to +105°C.

- Flame Retardant
- Zero Halogen
- Temperature range -40°C to +105°C
- RoHS Compliant



Bulk packed as standard; also available packed to your requirements. W3NH is available as 1.2m lengths, (shorter lengths on sizes 500/190 and 1200/400) or cut sleeves.




## Order Information

Order Reference	Expanded ID Bore Min. (mm)	Recovered ID Bore Max. (mm)	Wall Thickness (Nom. mm)
W3NH30/10	3.2	1.0	0.95
W3NH45/15	4.8	1.5	1.10
W3NH60/20	6.4	2.0	1.2
W3NH90/30	9.5	3.0	1.3
W3NH120/40	12.7	4.0	1.4
W3NH190/60	19.0	6.0	1.8
W3NH240/80	24.0	8.0	2.5
W3NH400/130	40.0	13.0	2.5
W3NH500/190	50.0	19.0	4.0
W3NH750/250	75.0	25.0	3.0
W3NH1200/400	120.0	40.0	3.0

Please contact us for any sizes not listed.....

Ordering Information Example  
W3NHP 30/10 x 50 BK

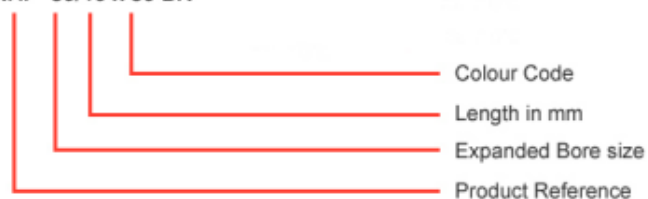

Omit the letter 'P' from code if you require continuous sleeving.

Colour Availability:

Black.

Other sizes available on request

# W3NH Cable Sleeves & Sleeving – Technical Data Sheet

## Product Properties

Property	Result	Test Method
Operating Temperature	-40 up to 105°C	life-Curve
Longitudinal Change	Pass	SAE-AS23053
Tensile Strength	Pass	ASTM D 638
Elongation at Break	Pass	ASTM D 638
Secant Modulus	Pass	ASTM D 882
Min. Shrink Temperature	-40 up to 105°C	Shrink curve
Shrinking starts at	20°C	Shrink curve
Low temperature flexibility (-40°C x 4h)	Pass	SAE-AS23053
Heat Shock (225°C x 4h)	Pass	SAE-AS23053
Copper mirror corrosion (175°C x 16h)	Pass	SAE-AS23053
Tensile strength after ageing (136°C x 168h)	Pass	ASTM D 638
Elongation after ageing (136°C x 168h)	Pass	ASTM D 638
Halogen Content	Zero	NFX-70-100. BS 6853
Flammability	Pass	Japanese Railway
Water Absorption	Pass	ASTM D 570
Flame spread Index	Pass	ASTM E162
Flammability-Oxygen Index	≥ 37	BS EN ISO 4589-2 / BS 6853
Flammability Temperature Index	> 350°C, Pass	BS 6853 / LUL E1042
Smoke density	< 150: R22/HL3	EN 45545-2
Oxygen-Index	≥ 37: R22/HL3	EN 45545-2
Toxic Fume Emission	< 0,75: R22/HL3	EN 45545-2
Toxic gas Generation	Pass	BSS 7239
Voltage Rating	Pass	600V
Volume Resistivity	> 10 <sup>13</sup> Ω·cm	ASTM D 876
Dielectric Strength	Pass	ASTM D 876
Fluid Resistance (after immersion 23°C x 24h)	≥ 6 MPa	IEC 60684-3-216
Fluid Resistance (after immersion 23°C x 24h)	≥ 200%	IEC 60684-3-216
Fungus resistance	Pass	ISO 846

## Business Management Accreditations



Registered in England No. 412829

©2023 SEI Identification Solutions Limited. All rights reserved. The information on this datasheet is provided for general information only. Although we make reasonable efforts to update the information on this datasheet, we make no representations, warranties or guarantees, whether express or implied, that the content of the datasheet is accurate, complete, or up to date. Users are advised to ensure that each product meets their own requirements, and we will not be liable for any loss or damage arising in connection with your use of or reliance on any information contained in this datasheet. Specifications given in this data sheet are subject to change without notice.